

Article

# Assessment of Physical and Chemical Properties in Northern Refineries' Water

Omar Taha Jory<sup>1\*</sup>, Abid Ahmad Erdeni<sup>2</sup>

1. Department of Biology, College of Education for Pure Sciences, Tikrit University, Tikrit, Iraq.
2. Department of Biology, College of Education for Women, Tikrit University, Tikrit, Iraq.

\* Correspondence: [Omar.taha.jory@gmail.com](mailto:Omar.taha.jory@gmail.com)

**Abstract:** This study investigates the physical and chemical characteristics of industrial wastewater from the Northern Refineries Company over a six-month period, aiming to inform the design of appropriate treatment units. Semi-monthly samples were collected from January to July 2023, revealing temperatures ranging from 19 to 38 degrees Celsius, turbidity from 4.1 to 31.2 NTU, and electrical conductivity from 623 to 1517  $\mu\text{S}/\text{cm}$ . Total dissolved solids varied between 450 and 980 mg/L, pH ranged from 6.8 to 7.7, and dissolved oxygen levels were notably high, between 1.4 and 7 mg/L. Chloride ion levels 16-19.3 mg/L mostly fell below permissible limits, as did sulfate ions. Phosphate concentrations ranged from 0.01 to 0.14 mg/L, while oil residues fluctuated between 0.54 and 124 mg/L. This research highlights the need for tailored wastewater treatment strategies to address specific contaminants and optimize environmental protection efforts in industrial settings.

**Keywords:** Water temperature, Turbidity, Total Dissolved Solids (TDS), pH Measurement, Phosphate

## 1. Introduction

Due to the growing harm that humans are causing to the environment as a result of technological advancement, the industrial development that goes hand in hand with it, and the changes that these factors have caused in the natural world, humanity is currently going through a difficult period in its history [1]. Large bodies of water and solid pollutants, most of which come from domestic, industrial, and agricultural activities, are a result of the environment—especially the aquatic environment—being irregularly exploited due to a variety of physical, chemical, and biological factors. These eventually cause the natural resources and aquatic life that peacefully coexist in the environment to decline [2, 3]. Crude oil refining wastewater can contaminate aquatic and terrestrial ecosystems, resulting in physical, chemical, and biological changes not seen in unpolluted environments [4]. This is a significant environmental problem. Rivers are contaminated by hydrocarbon compounds, acids, alkalis, dyes, toxic salts, fats, and mining, oil, and chemical industries' discharge of industrial waste [5]. The residues and pollutants left by this water are believed to be the cause of many environmental and health problems due to their effects on plants and animals. They also affect humans by causing a range of water-borne illnesses, such as allergies, cancer, lung diseases, and skin disorders. ailments [6].

Studying certain physical and chemical characteristics of industrial wastewater from the Northern Refineries Company is the primary goal of the current investigation.

**Citation:** Omar Taha Jory, Abid Ahmad Erdeni. Assessment of Physical and Chemical Properties in Northern Refineries' Water. Central Asian Journal of Medical and Natural Science 2024, 5(3),264-271.

Received: 24<sup>th</sup> March 2024

Revised: 24<sup>th</sup> April 2024

Accepted: 1<sup>th</sup> May 2024

Published: 9<sup>th</sup> May 2024



**Copyright:** © 2024 by the authors. Submitted for open access publication under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>)

## 2. Materials and Methods

The study examines the physical and chemical attributes of industrial wastewater from the Northern Refineries Company, focusing on a semi-monthly sampling over six months to identify qualitative features for optimal treatment unit selection. Samples were collected from January to July 2023, revealing water temperature fluctuations 19-38°C, turbidity variations 4.1-31.2 NTU, and electrical conductivity ranges 623-1517  $\mu\text{S}/\text{cm}$ . Total dissolved solids spanned 450-980 mg/L, pH levels 6.8-7.7, and dissolved oxygen concentrations 1.4-7 mg/L. Chloride ions 16-19.3 mg/L and sulfate ions remained below permissible limits. Phosphate values ranged from 0.01 to 0.14 mg/L, while oil residues varied from 0.54 to 124 mg/L. Sampling focused on wastewater discharge points, employing equipment calibrated for each parameter's measurement. The findings highlight pollutants surpassing American industrial water purifier thresholds, though the discharged water remains suitable for agricultural use for most of the study period. This underscores the necessity for rigorous monitoring and treatment optimization to meet environmental standards and minimize pollution levels effectively. Using the V26-SPSS software, the data were statistically analyzed using analysis of variance (ANOVA = analysis of variance) and least significant difference (LSD = least significant difference) to compare the arithmetic means of the various variables. The range, standard deviation, and Pearson correlation coefficient between these variables are calculated, and the means of the various variables are compared to ascertain the relationship between them.

## 3. Results

The wastewater exhibited varying physical and chemical characteristics during the study period. Water temperature ranged from 19 to 38 degrees Celsius, turbidity ranged from 4.1 to 31.2 NTU, and electrical conductivity ranged from 623 to 1517  $\mu\text{S}/\text{cm}$ . Total dissolved solids ranged from 450 to 980 mg/L, pH values ranged from 6.8 to 7.7, and dissolved oxygen levels varied from 1.4 to 7 mg/L. Chloride ions ranged from 16 to 19.3 mg/L, sulfate ions remained below permissible limits, and phosphate levels ranged from 0.01 to 0.14 mg/L. Oil residue concentrations fluctuated between 0.54 and 124 mg/L.

## 4. Discussion

### Physical properties

#### Water temperature

The conditions of the refinery's various operational units determine the nature and composition of the industrial water. At the study station (Figure 2), the water temperature varied from 19°C in the winter to 38°C in the summer, with an average of 20.3°C and a standard deviation of 6.4. The results of the analysis of variance show that the water temperature varies statistically significantly by 0.53 throughout the year, while there are no significant variations at the study station at any time of the year.

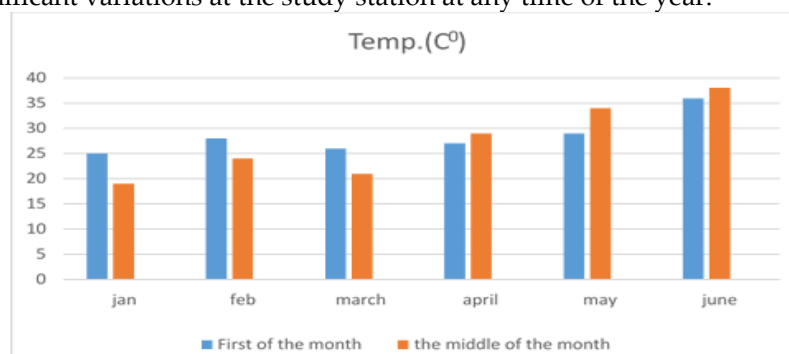


Figure 2. Seasonal changes in water temperature at the study site

### Turbidity

Turbidity values range between 2.4 NTU during the month of March and 31.2 NTU during the month of April at the study station, as shown in Figure 3 with an average of 25.2 NTU and a standard deviation of 7.3. The analysis of variance results demonstrated that neither the study site nor the seasons of the year significantly affected the turbidity. At a significance level ( $P < 0.01$ ), it was found that there was a strong significant relationship between turbidity and suspended solids (TSS) of 0.82. According to the US Environmental Protection Agency, the majority of the results were higher than the standard value (5 NTU) [14].

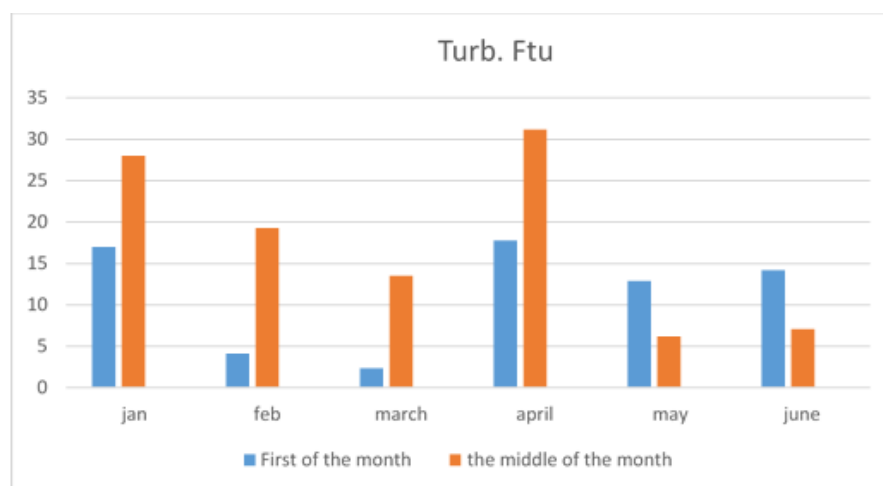


Figure 3. Seasonal changes in water turbidity at the study site

### Electrical conductivity

At the study site (Figure 4), electrical conductivity values vary from 623  $\mu\text{S}/\text{cm}$  in the spring to 1517  $\mu\text{S}/\text{cm}$  in the winter, with an average of 650.8  $\mu\text{S}/\text{cm}$  and a comparatively large standard deviation of 317. The study station's electrical conductivity varied significantly, according to the analysis of variance results, but seasonal variations were not statistically significant. Additionally, at the significance level ( $P < 0.01$ ), a positive correlation was noted with total hardness 0.87, phosphate 0.90, and oil residue 0.83. At a significance level of 0.05, it was discovered that there is a weakly negative relationship with air temperature of 0.43. The electrical conductivity results were compared with the standard value, which is higher than 1000  $\mu\text{S}/\text{cm}$  at the study station, as stated by the US Environmental Protection Agency [14]

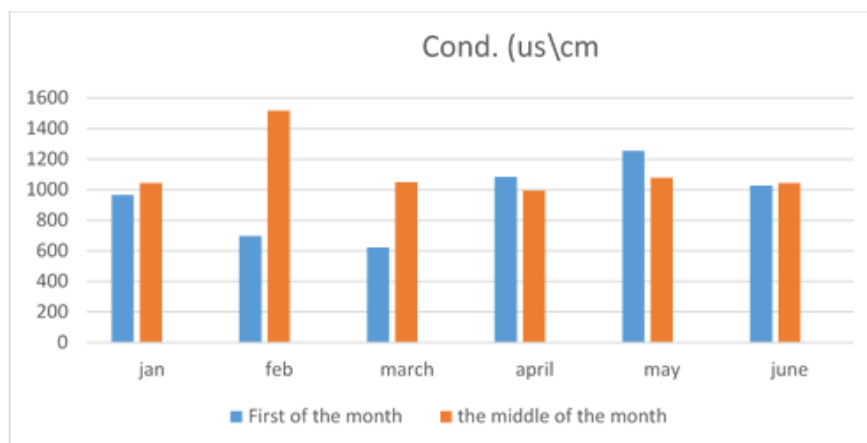


Figure 4. Seasonal changes in electrical conductivity at the study site

### Dissolved solids

At the study site (Figure 5), dissolved solids values vary from 29 mg/L in the spring to 45 mg/L in the summer, with an average of 171 mg/L and a standard deviation of 252. The analysis of variance results demonstrated that there were no discernible variations in the suspended solids concentrations between the study station and the different seasons of the year. The correlation analysis revealed a single, strong correlation with turbidity of 0.81 at a significant level ( $P < 0.01$ ), according to the results. The study station is characterized by high concentrations of dissolved substances during the summer, which are lower than the values of dissolved substances 31.15 mg/L for biologically treated water in the BasraxRefineryxComplex [15]. The reason for the rise in dissolved substances is the presence of large volumes of suspended particles in the water with a complex structure, living and dead organisms, and waste with a mixture of organic and mineral substances [17].


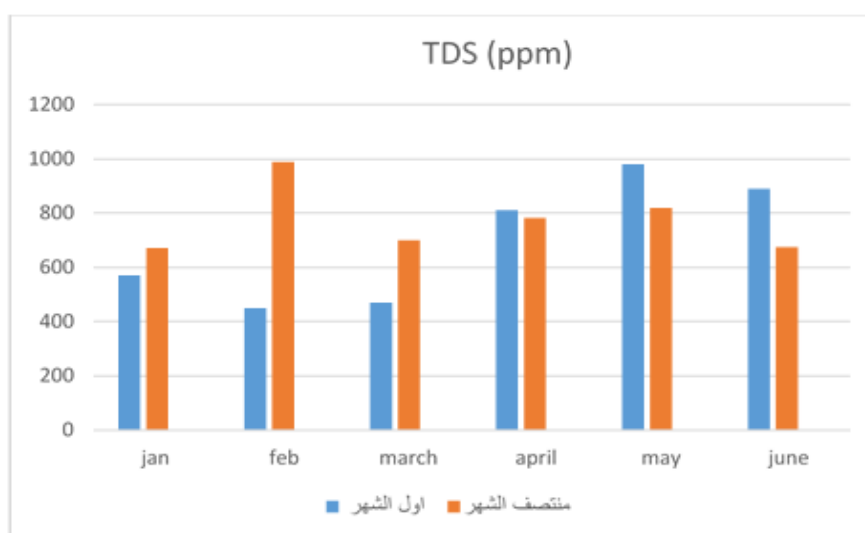


Figure 5. Seasonal changes in dissolved solids concentrations at the study site

### Chemical factors

#### pH


pH values range between 6.8 during the summer and 7.7 during the winter at the study site (Figure 6), with an overall average 7.64 and standard deviation 0.5. The significant differences in pH values between seasons were weak 0.43, as shown by the analysis of variance. The correlation analysis revealed a weak negative correlation at the significance level ( $P < 0.05$ ) with an OD of -0.49. The current study's findings demonstrated that the pH at the study site tends to be weakly alkaline, with the dominance of alkaline ions responsible for the high pH. Iraqi soil is rich in carbonate and bicarbonate compounds, so the amount of pH variation toward the alkaline side can be attributed to both the compounds found in the water and the compounds that seep into the water body from the surrounding soil.

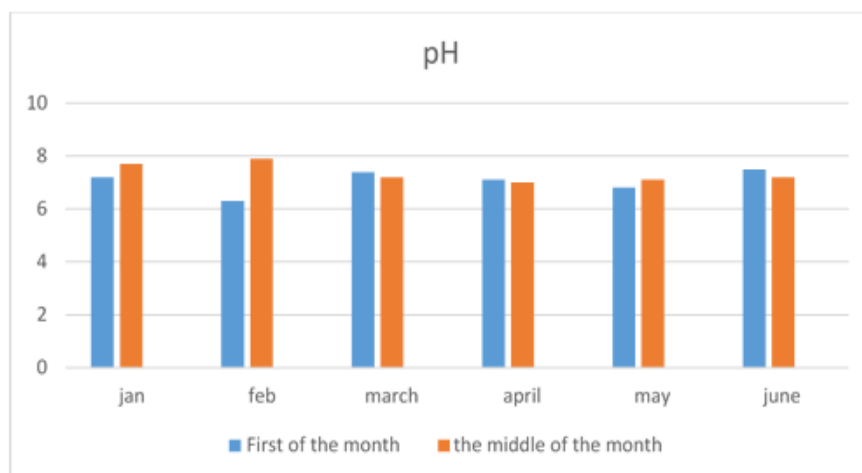

**Figure 6 Seasonal changes of pH at the study site**

### Oxygen dissolved in water

The lowest level of dissolved Oxygen was recorded at the study site during the spring 1.4 mg/L and the highest level 7 mg/L during the summer (Figure 7). The overall average was 6.42 mg/L with a standard deviation of 4.77. The results of the analysis of variance showed that there were no statistically significant differences during the study period. Statistical correlations between dissolved oxygen and some of the investigated variables that were previously explained are revealed by correlation analysis. In the spring, dissolved oxygen concentrations at the study site are low. The low oxygen saturation rate could be caused by the high salinity or the high water temperature, which increases the activity of microorganisms to break down organic materials in the water and depletes the amount of dissolved oxygen. The dissolution of dissolved oxygen in the water and the drop in pollutants are what cause the increase in dissolved oxygen concentration. Furthermore, an increase in atmospheric pressure causes oxygen to dissolve in water more readily. Most of the results of the study site do not match the results of dissolved oxygen standards, as stated by the US Environmental Protection Agency [14]

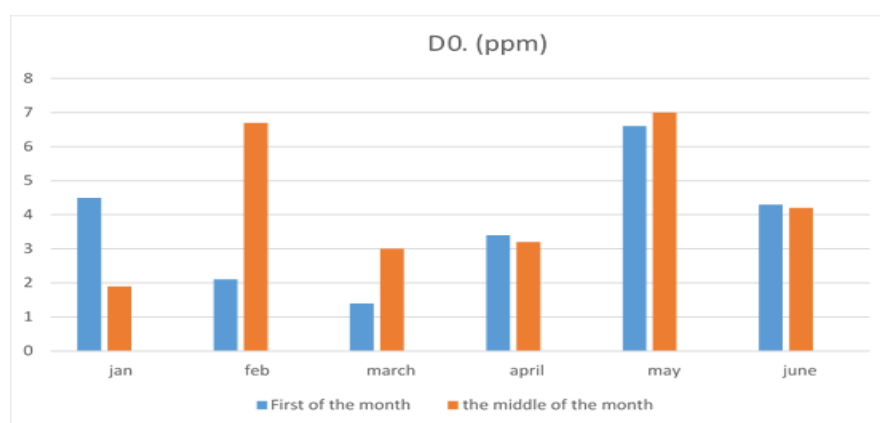

**Figure 7 Seasonal changes in dissolved oxygen concentrations at the study site**

### Chlorides

Chloride concentrations range between 16 mg/L during the winter and 19.3 mg/L during the winter for the station studied (Figure 8), with an average of 300 mg/L and a standard deviation of 180. The results of the analysis of variance showed that there were no significant differences in chloride concentrations for the studied station and between the seasons of the year. Two weak negative correlations with BOD at a significant level ( $P < 0.05$ ) and two negative correlations previously indicated at a significant level ( $P < 0.01$ )

between chloride concentrations and water temperatures were revealed by statistical analyses to find the Pearson correlation coefficient. The decomposition of organic materials found in industrial water waste raises the concentration of ions, including chloride, which is the cause of the high concentration of chloride in the winter. The US Environmental Protection Agency reports that most of the water at the current study station does not meet the standard specifications for drinking water due to chloride concentrations, in addition to what comes from wastewater rich in this ion [14].

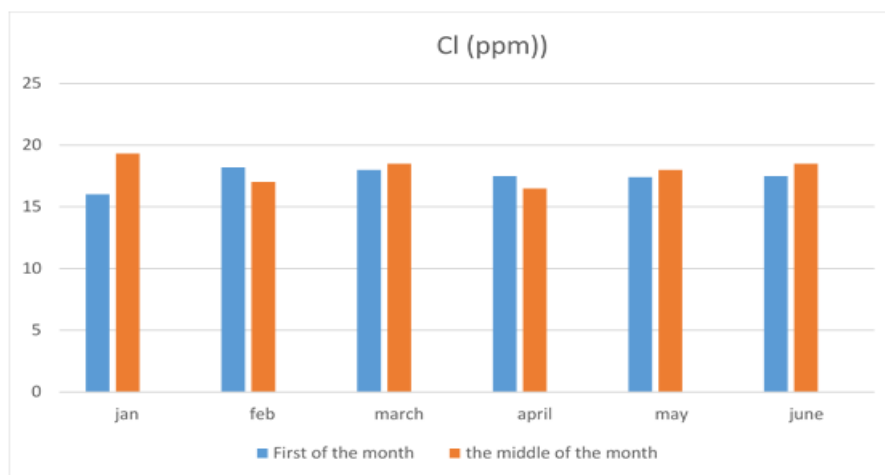


Figure 8. Seasonal changes in chloride concentrations at the study site

### Phosphate

At the station under investigation, phosphate concentrations vary from 0.01 mg/L in the summer to 0.14 mg/L in the winter (Figure 9), with an average of 0.53 mg/L overall and the 0.23 standard deviation. Using industrial wastewater, high phosphate concentrations are observed in the studied station in the second, fifth, and sixth months. The current study's findings suggest that some of the station's phosphate levels fall short of the US Environmental Protection Agency's standard requirements [14].

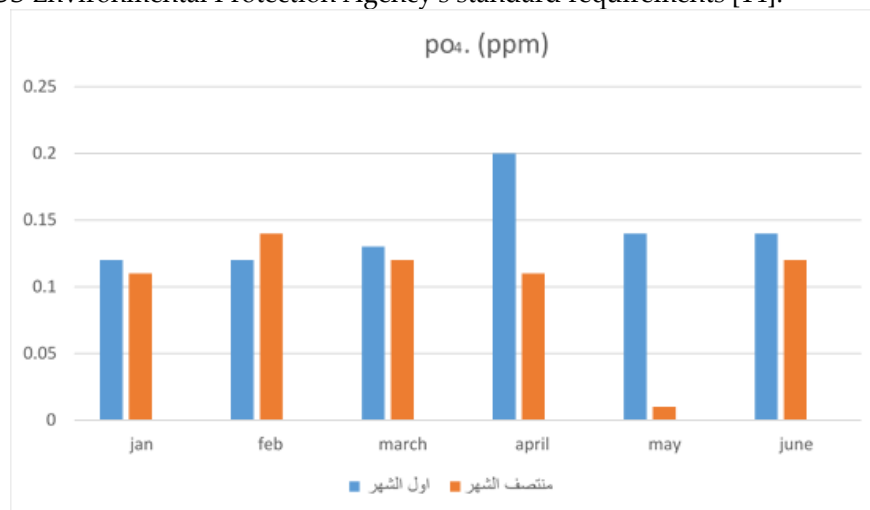


Figure 9. Seasonal changes in phosphate concentrations at the study site

### Oil waste

Concentrations of oil residues in the current study area range between 54 mg/L during the winter. The highest value is 124 mg/L during the winter at the study site (Figure 10), with an overall mean 4.24 mg/L and standard deviation 2.89. The analysis of variance results indicated that no differences were found between the seasons of the year under study, but there were statistically significant differences within the study station.

There is no need to repeat the significant correlations between oil residues and some study variables that have already been discussed. The study's findings demonstrated that, throughout all seasons, high concentrations of oil residue values were found in industrial wastewater leaving operating and production units, with waste oils having the highest value 124 mg/L in January. The lowest value 54 mg/L of waste oil was recorded at the study site during February of the same year. The values recorded at the study site exceeded the permissible limits estimated at 10 mg/L according to the specifications of the US Environmental Protection Agency [14].

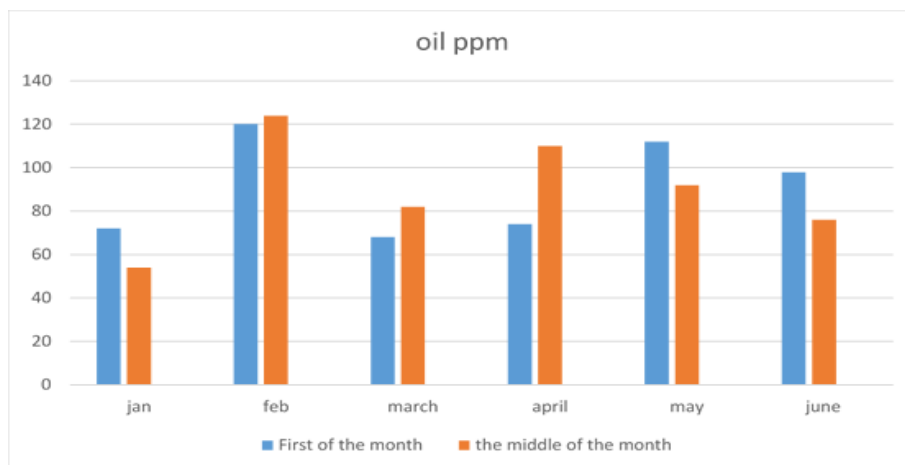


Figure 10. Seasonal changes in oil residue concentrations at the study site

## 5. Conclusion

The findings of this study provide a comprehensive understanding of the physical and chemical characteristics of industrial wastewater from the Northern Refineries Company over a six-month period. The observed levels of pollution for certain variables surpass those typically encountered in American industrial water purification systems. Despite this, the water discharged from the treatment units demonstrates suitability for agricultural purposes across most months of the study, underscoring the effectiveness of existing treatment protocols. These results emphasize the importance of ongoing monitoring and optimization of wastewater treatment processes to maintain water quality standards and mitigate environmental impact. Future research endeavors could focus on refining treatment strategies to further reduce pollutant levels and broaden the applicability of treated wastewater for various industrial and agricultural purposes, thereby enhancing sustainability practices within the industrial sector.

## REFERENCES

- [1] S. Abdel Qader, "Fundamentals of Ecology," 2nd ed. Amman, Jordan: Dar Wael for Printing and Publishing, 2004.
- [2] USEPA, "Methods for Chemical Analysis of Water and Wastes," Environmental Monitoring and Support Laboratory, Cincinnati, Ohio, USA, USEPA-600/4-79-020, 1983, pp. 365.1-1 and .4-1.
- [3] N.A.S. Al-Hamdani, "Application of Water Quality Indicators to Assess the Water Quality of a Number of Wells on the Left Coast of the City of Mosul, Iraq," M.S. thesis, College of Environmental Sciences and Technologies, University of Mosul, Iraq, 2020.



- [4] H.T. Al-Saad, S. Al-Taein, M. Al-Hello, and A. DouAbul, "Hydrocarbons and Trace Elements in the Waters and Sediments of the Marshland of Southern Iraq," *Mesopotamian Journal of Marine Science*, vol. 24, no. 2, pp. 126-139, 2009.
- [5] A.Y.T. Al-Safawi and Y. Reda, "Qualitative Evaluation of Tigris River Water Using Water Quality Factor WQI for Drinking Purposes of Nineveh Governorate, Northern Iraq," in *Proceedings of the 7th International Conference of the Water Resources Research Center, University of University*, 2018, pp. 189-200.
- [6] N.M. Azeez and A.A. Sabbar, "Efficiency of Duckweed (*Lemna minor* L.) in Phytotreatment of Wastewater Pollutants from Basrah Oil Refinery," *Journal of Applied Phytotechnology in Environmental Sanitation*, vol. 1, no. 4, pp. 163-172, 2012.
- [7] Hach Company/Hach Lange GmbH, "Tetraphenylborate, Method: 8049," Edition 1, DOC316.53.01339, 2014.
- [8] Hach Company/Hach Lange GmbH, "Mercuric Thiocyanate, Method: 8113," Edition 9, DOC316.53.01017, 2018.
- [9] USEPA, J.W. O'Dell, "Method 375.2, Revision 2.0: Determination of Sulfate by Automated Colorimetry," 375.5, pp. 1-11, 1993.
- [10] USEPA, "Approved for Wastewater Analyses," Standard Method 5220 D, Federal Register, vol. 45, no. 78, pp. 26811-26812, 1980.
- [11] Hach Company, "Total Petroleum Hydrocarbons TPH: Method 10050," 3rd ed. Loveland, CO, USA: Hach Company, 2020.
- [12] O. Osibanjo, A.P. Daso, and A.M. Gbadebo, "The Impact of Industries on Surface Water Quality of River Ona and River Alaro in Oluyole Industrial Estate, Ibadan, Nigeria," *African Journal of Biotechnology*, vol. 10, no. 4, pp. 696-702, 2011.
- [13] S. Pandey and J. Ramontja, "Natural Bentonite Clay and Its Composites for Dye Removal: Current State and Future Potential," *American Journal of Chemistry and Applications*, vol. 3, no. 2, pp. 8-19, 2016.
- [14] P.R. Robinson and E.I. Shaheen, "Environmental Pollution Control: Practical Advances in Petroleum Processing," pp. 395-447, 2006.
- [15] A. Saliot, C. Andre, A. Fevrier, M. Goutx, and M. Tissier, "Analysis and Budget of Biogeochemical Markers in Dissolved, Small and Large Size Suspended Matter in the Ocean," in *Advances in Organic Geochemistry*, John Wiley Chichester, pp. 251-258, 1983.
- [16] T.H.Y. Tebbutt, "Principles of Water Quality Control," 6th ed. London, UK: Butterworth Heinemann, p. 273, 1998.
- [17] M. Varol, B. Gökot, A. Bekleyen, and B. Şen, "Spatial and Temporal Variations in Surface Water Quality of the Dam Reservoirs in the Tigris River Basin, Turkey," *Catena*, vol. 92, pp. 11-21, 2012.